




Beam and detectors

Beamline for Schools 2019

Note


If you have participated in BL4S in the past, you may have read earlier versions of this document. Please note that in 2019 the BL4S experiments will take place at DESY, Hamburg, Germany. The conditions of the beam at DESY are different from what CERN was offering until 2018. Please read this document carefully to understand if your experiment is feasible under the conditions available at DESY.



Preface


All the big discoveries in science have started by curious minds asking simple questions: How? Why? This is how you should start. Then you should investigate with the help of this document whether your question could be answered with the available equipment (or with material that you can provide) and the experimental setup of Beamline for Schools at DESY. As your proposal takes shape, you will be learning a lot about particle physics, detectors, data acquisition, data analysis, statistics and much more. You will not be alone during this journey: there is a list of [volunteer physicists](#) who are happy to interact with you and to provide you with additional information and advice.

Remember: It is not necessary to propose a very ambitious experiment to succeed in the Beamline for Schools competition. We are looking for exciting and original ideas!



Contents

Introduction	4
The Beamline for Schools	4
Typical equipment	4
Trigger and readout	5
The Beam Lines	6
Beam production	6
Bending magnets	7
Collimator	7
Beam composition	8
The DESY test beam areas	9
The BL4S detectors	10
Scintillation counter	10
Delay Wire Chamber (DWC) / Tracking chamber	10
MicroMegas detectors / Tracking chamber	11
Beam telescope	11
Multi Gap Resistive Plate Chamber (MRPC)	12
Timepix detector	13
Lead crystal calorimeter	14
Halo counter	15
Additional Equipment	16
BRM dipole magnet and PCMAG solenoid	16
Other infrastructure	16
Data Acquisition	17
Glossary	18



Introduction

The Beamline for Schools

There are two types of setups for experiments with elementary particles: collider and fixed target configurations. In a [Collider](#) experiment (like experiments at the Large Hadron Collider (LHC)), accelerated particle beams travel at close to the speed of light before they are made to collide. In a fixed-target experiment, a beam of accelerated particles collides with a target at rest, which can be a solid, liquid, or gas. The Beamline for Schools (BL4S) experiment is of the fixed target type.

The BL4S experiments will take place at one of the beam lines at the DESY II Test Beam Facility. Electrons circulating in the DESY II [Synchrotron](#) with 6.3 GeV beam energy hit a carbon fiber target generating photons, which are then subsequently converted to electrons and [positrons](#) of variable energies. This stream of particles is called the [Secondary beam](#) or the test beam. You as the user of the beam line can choose the charge, the [collimation](#) and the momentum of the beam entering the experiment area by adjusting a series of [collimators](#) and magnets. *The beam will contain either electrons or [positrons](#) with a well defined momentum.*

Typical equipment


In a typical experiment, commonly used elements to identify or measure the properties¹ of particles are:

- [Scintillation counters](#), or scintillation detectors or just scintillators, for recording the passage of a charged particle,
- [Tracking](#) chambers for measuring the position of a charged particle within the active volume of a detector,
- Electromagnetic [calorimeters](#) for measuring the energy of electrons, positrons and photons,
- Magnets to enable measuring the momentum of charged particles².

These detectors are *electronic* detectors: when a particle interacts with the detector, an analogue electrical signal is produced in different ways. In a [Cherenkov detector](#) or a [scintillator](#), light is emitted and converted into an electrical pulse using a [Photomultiplier](#). In a gaseous [Tracking](#) chamber, ionization of the gas generates

¹Like their path or momentum.

²Bending magnets have to be used together with tracking detectors. The bending angle of a particle that passes through a certain magnetic field is inversely proportional to its momentum.



electrons that are multiplied in electric fields. The typical duration of the signals is 100 ns and the signal voltages are typically 100 mV to 1 V. The signals are sent to a readout system where they are digitized and eventually read out by a computer and stored to a hard disk. In solid-state detectors like silicon sensors, the particle generates electron / hole pairs along its trajectory. The generated charge is usually on the level of 20 000 electrons or less and is collected at the edge of the sensor. The signal is then digitized close to the sensor and readout by a computer.

Examples of detectors in the BL4S experiment are described in more detail in the following chapters. It should be emphasized that experiments can be conducted without making use of all of these detectors.

Trigger and readout

Signals from some of the detectors are used to build the [Trigger](#). The trigger logic identifies interesting interactions (“events”) and instructs the computer to initiate the readout of the data from all the detectors. The trigger is a fundamental and complex component of LHC experiments, where collision rates are very high and only a very small fraction of the collisions are of interest³. In BL4S, the trigger is much simpler and might, for example, require coincident signals from two or more scintillators along the beam path to indicate the passage of a particle. When a trigger occurs, data from all detectors are recorded by the readout system and a signal is sent to a computer that transfers the data to mass storage, usually a disk. This mechanism is very similar to when you take a picture with a digital camera. When the shutter-release button is pressed, data (light) is transferred to the charge coupled device (CCD) and recorded to memory. One difference is that in the case of BL4S, the exposure time is about 100 ns.

A large amount of software has been developed at CERN and elsewhere for the analysis of experimental data. The analysis software is based on a framework called [Root](#), which is used by many physics laboratories all over the world.

³For example, the production of a Higgs [Boson](#) occurs in one out of a trillion events (where one trillion is 10^{12}).

The Beam Lines

Beam production

The beam production at the DESY II Test Beam Facility is sketched in Figure 1. The electron bunches in the DESY II accelerator cross at three points the primary target stations. Here, **Bremsstrahlung** photons are produced at a $7\ \mu\text{m}$ thick carbon fiber target which is put into the beam. These photons fly towards a secondary target, also called conversion target, where electron / positron pairs are produced in a few mm thick metal plates. These pairs pass a dipole magnet with a collimator behind. By steering the magnetic field in the dipole and the collimator opening, the momentum and the momentum spread of the resulting electron or positron beam in the following test beam area can be chosen to any values between 1 and 6 GeV/c. The resulting beam consists of mainly single electrons or positrons at rates of up to several kHz, depending on chosen momentum⁴.


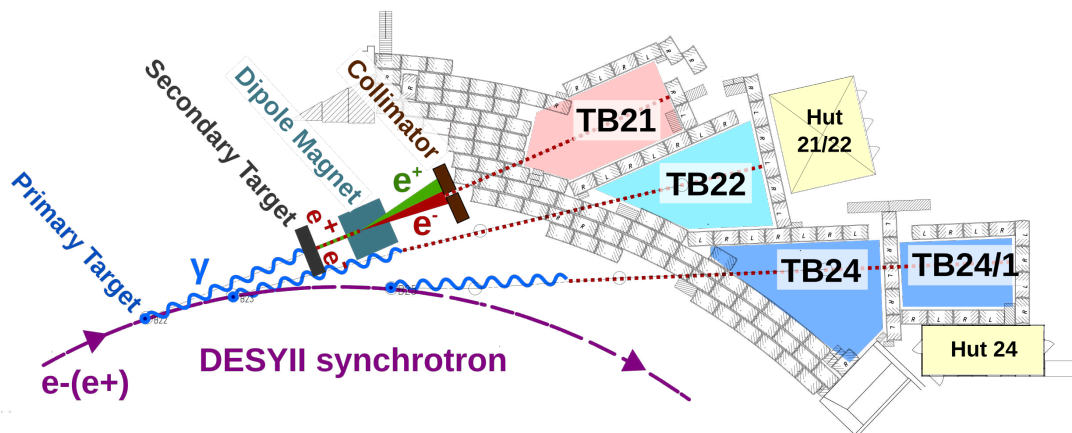


Figure 1: Sketch of the test beam production at DESY II. The text gives detailed information about the various points along the beam-path.

As the beam line provides mostly one particle at a time, it lends itself well to experiments that focus on effects that can be seen with individual particles. Experiments that require a high number of particles (e.g. the irradiation of electronics) are more difficult to realize.

⁴In high-energy physics, the units for energy, momentum and mass are GeV, GeV/c and GeV/c², respectively, where c is the speed of light. In the world of particles, these units are more practical than the the MKS units: $1\ \text{GeV} = 1.6 \times 10^{-10}\ \text{Joule}$, $1\ \text{GeV}/c^2 = 1.783 \times 10^{-27}\ \text{kg}$. Time is usually measured in nanoseconds (ns), where $1\ \text{ns} = 10^{-9}\ \text{s}$, which is the time it takes for light to move a distance of 30 cm. For comparison, the maximum energy of the Proton beam at the LHC is 6500 GeV/c.



Bending magnets

Bending magnets⁵ are used in the beam line not only to guide the particles in a certain direction, but also to choose the particles' momenta (between 0.5 GeV/c and 6 GeV/c) by defining the magnet currents accordingly. A bending magnet is a dipole (Figure 2) with a vertically-orientated magnetic field. The particles that cross the field will be deflected horizontally.

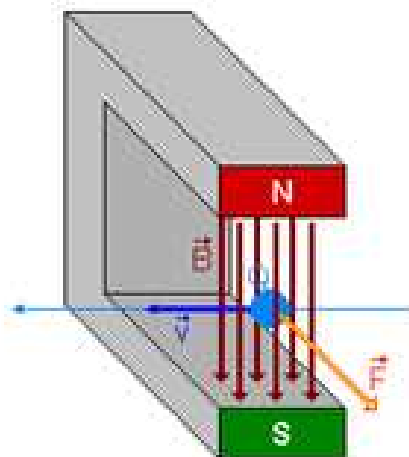


Figure 2: A dipole magnet with the vertical magnetic field and a charged particle moving horizontally into the field. The force is perpendicular to the magnetic field vector and the velocity vector, deflecting the charged particle horizontally. Image source: https://hr.wikipedia.org/wiki/Portal:Fizika/Slika/37,_2007.

Collimator

A collimator is a tool used to filter the beam of particles. There are two sets of collimators in the beam lines at DESY. The primary collimator is movable in both x and y and defines the **Momentum acceptance** and **Beam divergence**. A secondary collimator in the test beam area allows to further reduce the **Beam halo**. This is realized as a lead inset with openings from 2 mm × 2 mm to 50 mm × 50 mm. The flux available is proportional to the collimator settings.

⁵You might consider watching this short instructional video, which shows how charged particles move when influenced by a magnetic field: [Particle movement in a magnetic field](#).



Beam composition

The amount of particles in the beam depends on the selected momentum, the [Collimator](#) opening and the polarity. The particle rate can reach up to 10 kHz. Figure 3 shows the typical dependence of the particle rate on the selected particle momentum. For example, if you select a beam momentum of 1 GeV/c, the relative particle rate is approximately 0.5. Therefore the beamline will deliver 5000 particles per second when the beam is on. The negative (positive) beam contains negatively (positively) charged electrons (positrons). It is not possible to have a beam of photons. The particles of test beam are relativistic. This means they are moving at almost the speed of light.

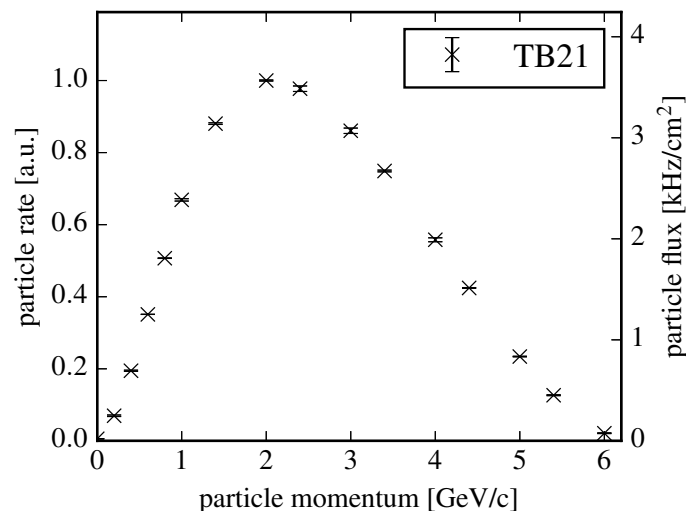



Figure 3: Typical dependence of the beam rate on the selected momentum; in this example measured in area TB21. The rates is normalized to a maximum of 1.0.

The beam provided by DESY II is pulsed due to the DESY II cycle of 80 ms⁶. There is one pulse every 80 ms. The duration of a pulse depends on the selected particle momentum and varies between 20 and 40 ms.

The beam has a more or less round cross section. The beam spot size is driven by the collimators and has a typical dimension of 2 cm × 2 cm when entering the beam area. The further away the beam is from the entrance window, the wider it gets.

The amount of background particles (photons, [muons](#), neutrons) generated in addition to the electrons and positrons is negligible. The beam at DESY can be considered a pure electron / positron beam.


⁶A period in which DESY II ramps from 450 MeV to 6.3 GeV and back to 450 MeV again.



The DESY test beam areas

The Beamline for Schools takes place in one of the test beams areas, which have a size of about 5 m × 10 m, where the available equipment which can be laid out according to the needs of your experiment. Also, depending on the area, there are some fixed installations like two big magnets and beam telescopes (detailed descriptions below). Additionally, it may be possible to install devices that are brought by your team to the experimental area⁷. Each request will be reviewed individually and will need to respect health and safety guidelines. For example, the installation of large amounts of combustible material (e.g. wood) is not possible for safety reasons. It is also not possible to expose any [Biological material](#) to the beam.

⁷Please note that CERN and DESY cannot guarantee the installation of all the suggested devices.



The BL4S detectors

Scintillation counter

A **scintillator** is a material that produces scintillation light, a property of luminescence, when excited by ionizing radiation⁸. Luminescent materials, when struck by an incoming charged particle, absorb some of the particle's energy and scintillate, i.e. re-emit, the absorbed energy in the form of light. A scintillation counter is obtained when a scintillator slab is connected to an electronic light sensor, in our case a sensitive **Photomultiplier** tube. Photomultiplier tubes absorb the light emitted by the scintillator and re-emit it in the form of electrons, via the photoelectric effect. The subsequent multiplication of these photoelectrons results in an amplified, electrical pulse that can be analyzed; yielding meaningful information about the particle that originally struck the scintillator.


Two scintillators are part of the fixed setup of the beam line. Several additional scintillators are available for installation in the experiment. The scintillators can be used for counting particles or for setting up the trigger logic. Fast scintillators can be used for timing the particles (i.e. measuring the time it takes for a particle to travel from one scintillator to another).

Delay Wire Chamber (DWC) / Tracking chamber

The Delay Wire Chamber (DWC) is a multi-wire chamber that can give the coordinates of the position of a particle that passed through the detector. It uses an array of wires at high voltage connected to a delay line. The chamber is filled with gas (a mixture of argon and CO₂). Any **ionizing particle** that passes through the chamber will ionize the atoms of the gas. The resulting ions and electrons are accelerated by an electric field across the chamber, causing a localized cascade of ionization. The signal from the wires builds up two electric waves in the delay line, one in each direction. By using a reference signal as a common start and measuring the time delays for the waves to reach each end of the delay line, the impact point —where the first ionizing took place— can be determined.

The active area is 10 cm × 10 cm and position resolutions of 200 μm–300 μm can be achieved. The unit "μm" represents a micrometer, one millionth of a meter. However, the chamber can measure only one particle inside a certain time window of approximately 100 ns. Three DWCs are available for the experiment, if required.

⁸You can watch a simple animation here:
https://upload.wikimedia.org/wikipedia/commons/2/22/Scintillation_Detector.gif .



MicroMegas detectors / Tracking chamber

MicroMegas detectors serve the same purpose as DWCs; they allow you to track particles. They are “better” than the DWCs because they have a larger surface and a higher resolution. The disadvantage is that they are not as fast. With the electronics that will be used to read those out, we can at most track 500 particles per second. The MicroMegas detectors have a spatial resolution of about $200\ \mu\text{m}$ and an active area of $40\ \text{cm} \times 40\ \text{cm}$. They are 1D detectors and therefore able to record the position of a charged particle in the vertical or the horizontal plane. As there are four of them, you can build, by combining two of them, two 2D detectors. The MicroMegas, for example, can be used behind the BRM (see below) to record the angle by which charged particles are deflected in the magnetic field. You may also be able to use them in order to measure the scattering of particles in a target that you install in the beam line.

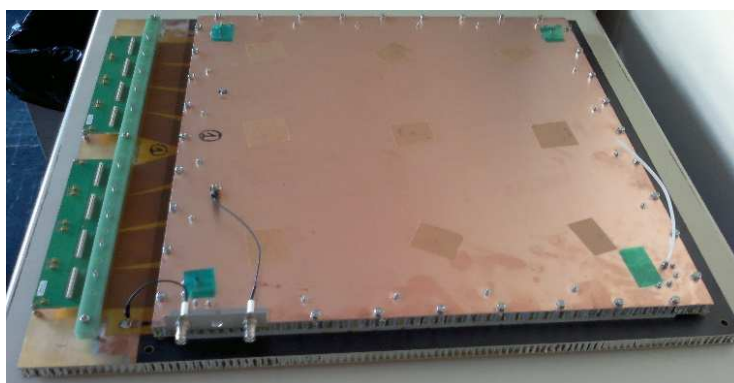


Figure 4: MicroMegas detector.

Beam telescope

A beam telescope can measure the track of a particle with high precision. Knowing the track of a particle allows pointing to the source of the beam —thus, it is historically called telescope as the telescopes used in astronomy. The resolution achievable by a telescope are usually in the order of a few μm .

A beam telescope consists of at least three planes which are subsequently ordered along the beam axis. Each plane has a sensitive silicon pixel chip similar to nowadays camera chips in mobile phones. If a high energetic charged particle will go through the chip it will deposit a small amount of energy which is amplified in the sensor and results in a signal in the corresponding pixel cell. Knowing the positions in the

pixel matrix in each telescope plane, the track of the particle can be identified which corresponds mostly to a straight line through all signal pixels of the three planes.

A typical application is having each three planes before and after the sample under test. Due to the high precision of the telescope sensors, the scattering angle of the particles caused by the sample can be determined. Finally, by recording billion⁹ of particle tracks a scattering image illustrates the material budget of the sample. Thus, a beam telescope acts as a camera which is using charged particles like electrons instead of photons. Compared to the DWC and the MicroMegas detector, the telescope has by far the highest spacial resolution and provides therefore the most accurate tracking. The disadvantage is that the sensors of the telescopes have a surface of only $2\text{ cm} \times 1\text{ cm}$.

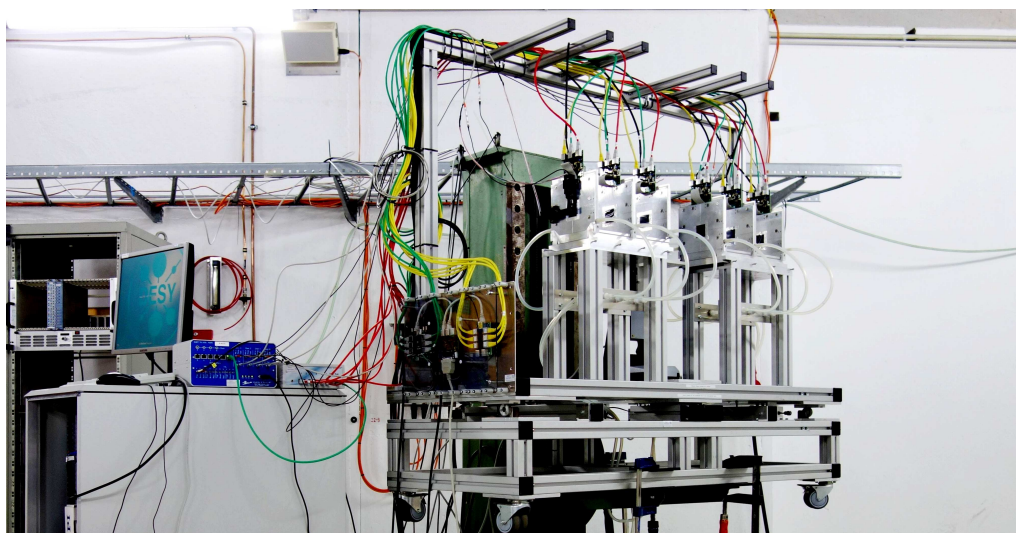


Figure 5: One of the beam telescopes installed at the DESY test beam. Visible are the six layers of the telescope on the right side (square aluminum plates with a black rectangle in the middle) and the readout rack with the TLU (trigger logic unit) on the left side.

Multi Gap Resistive Plate Chamber (MRPC)

Our three MRPC detectors have a surface area of $30\text{ cm} \times 30\text{ cm}$. They provide, like the DWCs, [Tracking](#) information but with a much smaller resolution. Their main advantage is that they can provide very accurate time information for the passage of

⁹With the particle rates at the DESY II test beam, recording these billion events can take up to 70 h.

a particle. In a well-calibrated system, values as low as 100 ps^{10} can be reached. Therefore, the MRPCs are very useful detectors for time-of-flight measurements.

The MRPC consists of a stack of resistive plates, where spacers between these plates define a series of gas gaps. Anode and cathode electrodes are placed on the outer surfaces of the outermost resistive plate while all interior plates are left electrically floating. The resistive plates are transparent to the fast signals generated by the avalanches inside each gas gap. The induced signal on the external electrodes is the *sum* of the activities of *all the gaps*. You can use the MRPCs to check if the electrons or positrons are really traveling at the speed of light.

Timepix detector

The **Timepix** chip is designed as a universal readout chip for various types of radiation. It can be used in combination with a pixelated semiconductor detector with a gaseous **Time Projection Chamber (TPC)** or without any sensor (electro-statically collecting electrons)¹¹.

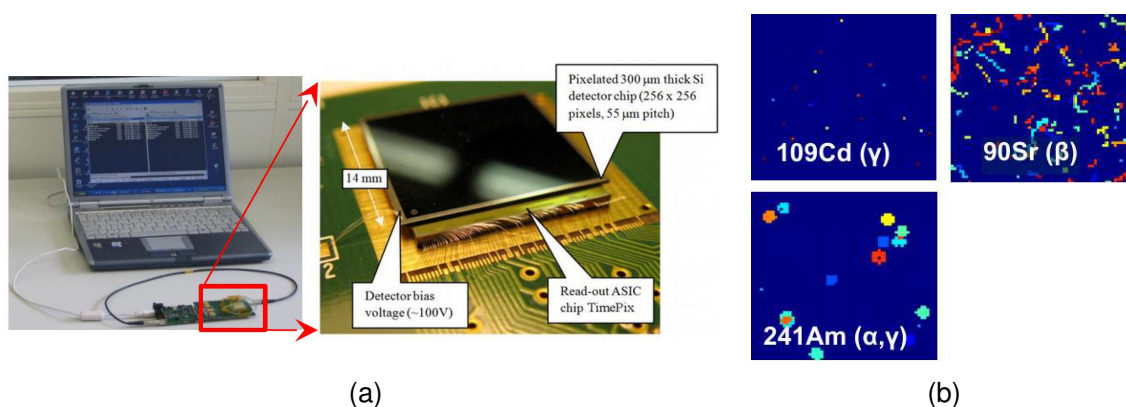



Figure 6: The timepix **Pixel detector**:

- This device consists of two chips connected by the bump-bonding technique. The upper chip is a pixelated semiconductor detector (usually silicon), the bottom one an ASIC readout.
- Sample ToA data from Timepix, Top left: gamma photons (dots), Top right: beta particles (squiggles), Bottom left: mixed field of gammas (dots) and alphas (blobs).

The available device consists of a semiconductor detector chip bump-bonded to the readout chip. The detector chip is equipped with a single common backside electrode and a front side matrix of electrodes (256×256 square pixels with a pitch of $55 \mu\text{m}$).

¹⁰Where ps stands for pico second, one trillionth of a second.

¹¹See also these videos: [Medipix 2 - See Through Science](#) and [Material resolving CT using Timepix](#)



Each Timepix pixel can work in one of three modes:

1. Medipix mode — The counter counts the incoming particles.
2. Timepix mode or ToA (Time of arrival mode) — The counter works as a timer, measuring time of the particle detection. This mode distinguishes between particles and / or reconstructs tracks of particles.
3. Time over threshold (TOT) mode — Measurement of the amount of deposited charge in each pixel.


The chip can deliver up to 1000 frames per second. Usually, this kind of device is used for particle [Tracking](#).

Lead crystal calorimeter

A lead crystal [Calorimeter](#) is a detector that measures the energy of impinging particles (therefore it is not a [Tracking](#) detector). An electron hitting the calorimeter will produce a fully contained [Electromagnetic shower](#), depositing all its energy in the calorimeter and thus allowing a very precise measurement of its energy. By measuring the deposited energy, the energy of the incoming particle can be measured. The 16 available calorimeters each have a volume of $10\text{ cm} \times 10\text{ cm} \times 37\text{ cm}$ (Figure 7).



Figure 7: Stack of lead crystal calorimeters.



Halo counter

The halo counter is a set of 4 **scintillators** that form a hole around the beam passage (Figure 8) or a single scintillator with a hole. Its purpose is to identify particles that are too far away from the beam axis. While a collimator immediately filters the beam by rejecting particles with a larger angle, the halo counter identifies them and thus makes it possible to choose to either reject or flag them. This is useful, e.g. for flagging particles that interacted with a certain absorber and underwent scattering. The opening of the BL4S halo counter can be adjusted between 1 cm and 15 cm.

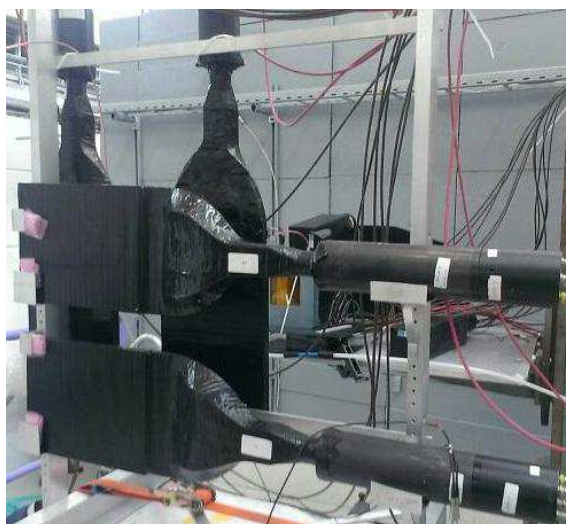


Figure 8: A Halo counter.

Additional Equipment

BRM dipole magnet and PCMAG solenoid

At the DESY test beam, two large magnets are available.

One is a superconducting solenoid magnet with a field of up to 1 T, called PCMAG, installed in area TB24/1 (Figure 9a). It can house detector setups of diameters up to 77 cm, which are supported inside the magnet on two rails. Along the magnet axis, which is perpendicular to the beam direction, the field is homogeneous within a few percent along a range of about 60 cm. This magnet is mounted on a movable stage, so it can be moved relative to the particle beam to allow for measurements at different places inside the installed detector. In addition, its angle to the beam direction can be set from -45° to 45° .

The second magnet is a normal conducting dipole, called Big Red Magnet (BRM), with a field up to 1.35 T installed in area TB21 (Figure 9b). It has an integrated length of about 1 m and an opening that is about 1.5 m wide and 0.35 m high.



(a) PCMAG




(b) BRM

Figure 9: Left, a): PCMAG, 1 T solenoid magnet mounted on a movable stage. Right, b): BRM, 1.35 T dipole magnet.

Other infrastructure

The areas at DESY also provide a laser alignment system which simplifies putting the setup in the exact beam location. Also, a huge collection of so-called NIM modules are available which can be used for simple signal processing and trigger generation.




Additional electronic modules for the read-out of the detectors as well as associated software will be provided by CERN. We do not expect you to design the read-out system of your experiment. This will be done by experts of DESY and CERN for the winning proposals.

Data Acquisition

BL4S will provide a complete data acquisition system for reading out the detectors and controlling the experiment. This system is fast enough to trace up to 2000 particles per second.


The data acquisition system provides tools for the on-line monitoring of the experiment in the form of histograms.

Don't worry about the details of this system. Experts of CERN and DESY will help the winners of BL4S to set-up the system and will also provide code for and assistance with the analysis of your data.



Glossary

Beam divergence	The widening of the beam along its path. 7
Beam halo	The cloud of particles surrounding the main beam in an accelerator. 7
Biological material	Living cells, human / animal tissue. 9
Boson	Particles can be categorized as bosons or fermions according to their intrinsic spin. 5
Bremsstrahlung	An electromagnetic radiation produced by the deceleration of a charged particle when deflected by another charged particle. See also: Wikipedia:Bremsstrahlung . 6
Calorimeter	A detector that measures the energy of a particle. 4, 14
Cherenkov detector	A gas volume that emits light when it gets penetrated by charged particles. The light emission depends on the type of particle and its momentum. Wikipedia: Cherenkov detector . 4
Collider	An accelerator that collides two beams which are cruising in opposite directions as in the LHC. 4
Collimator	A device to limit spatial width of the beam perpendicular to its direction of flight. See also: Wikipedia: Collimator . 4, 8
GeV, Electronvolt	A unit of energy used in particle physics 6
GeV/c	A unit of momentum used in particle physics. 6
GeV/c²	A unit of mass used in particle physics. 6
Ionizing particle	A particle with enough energy to knock out electrons of atoms or molecules. 10



MicroMegas	Micro-MEsh Gaseous Structure, a particle detector amplifying ionization signals in a gas volume. See also: Wikipedia: MicroMegas . 11
MKS units	Units expressed in meters, kilograms and seconds. 6
Momentum acceptance	Particles with this range of momentum will pass through. 7
Muon, μ	A particle like an electron but much heavier and not stable (decays into other particles). 8
Photomultiplier	A device that converts photons into electric signals. 4, 10
Pixel detector	A tracking detector with a 2-dimensional array of sensors; usually made from silicon. 13
Positron, e^+	An elementary particle that is the antimatter twin of the negatively charged electron; this means both have the same properties, but the positron is positively charged. 4
Proton	A proton is a subatomic particle, with a positive electric charge. 6
Electromagnetic shower	An avalanche of particles created from the interaction of a high-energetic particle with the material of a calorimeter. 14
Root	A powerful software framework for the display and analysis of physics data. 5
Scintillation counter	A transparent material that emits light when penetrated by charged particles. 4, 10, 15
Secondary beam	Particles created from the interaction of the primary beam with a target. 4
Synchrotron	A specific type of particle accelerator, in which the particles are accelerated and fly along a circular path. See also: Wikipedia: Synchrotron . 4



Tracking

The measurement of the trajectory of a particle. 4, 12, 14

Trigger

It identifies interesting interactions (“events”) and instructs the computer to initiate the read-out of the data from all the detectors. 5